



Product Instructions for Target Mat, Crossbar & Post Assembly



800-233-5484

| [PalosSports.com](https://www.PalosSports.com)

| [#PalosSports](https://www.instagram.com/PalosSports)

Instructions for Target Mat, Crossbar & Post Assembly

* All parts are referred to by letter. Please reference image #1 for part names & letter association.



Crossbar Components

A. T-Connector - Qty. 2

B. Connects Part A to Part D - Qty. 2

C. Middle Connector (Connect 2 crossbar halves) - Qty. 1


D. Crossbar Halves - Qty. 2

1. Connect the 2 halves of the crossbar (Part D) using Part C. The far ends of Parts D should have 3 holes.

The middle portion of parts D will have 1 hole. This is where Part C will connect.

2. Insert Part C into the first halve of part D by pressing down onto the push pin. Make sure the pin pops securely into the available hole.

3. Repeat step 2 for the second half of the crossbar. Make sure both halves are connected securely.

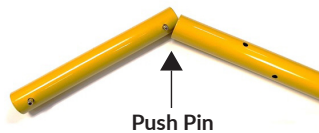

800-233-5484
PalosSports.com
#PalosSports



4. Insert Part B into the T-Connector (Part A) by pressing down on the push pin. *Note: Insert the side of Part B that has the push pin which is closest to the end of the tube.



5. Insert the other side of Part B into the end of the assembled crossbar tube. This end should have 3 holes. The push pin should insert into the last (third) hole.



6. Repeat step 5 for the other T-Connector and opposite side of the crossbar.




7. Insert the assembled T-Connector and crossbar into the top of the tall or short post. Make sure the push pin on the T-Connector is popped securely into the second hole on the post.

8. Repeat step 7 for the other post and connector.

9. Raise the posts to a high enough setting to allow for the full length of the target mat hang freely.

10. Next, insert the posts into the two Powrbases.

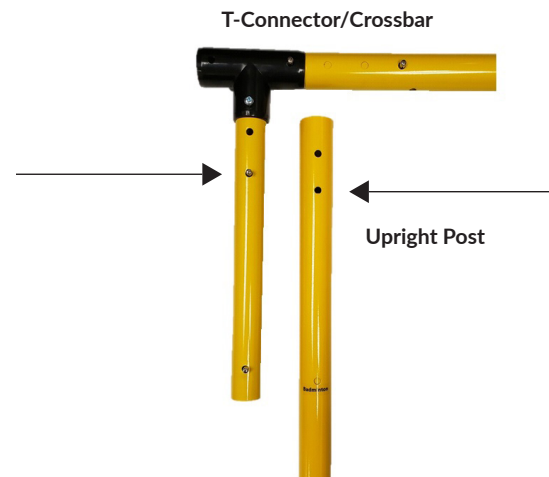

800-233-5484
PalosSports.com
#PalosSports




11. Push the plug with locking pin into the large base. Remove the metal locking pin from the plug. Insert the narrower, or bottom portion, of the tall or short post into the plug. You may have to twist or use firm pressure to move the post into the plug. Line up the larger hole at the bottom of the post with the locking pin hole in the plug. Insert pin through both holes and secure with nut.

12. Repeat step 11. for second base and post.

*** Completed Base/Crossbar/Post Setup (At this point you may fill the bases with water, sand or pea gravel)**

13. Unfold dual-sided target mat. Peel back the top Velcro flap and wrap around the top crossbar. Peel back the Velcro side flaps and wrap around each of the two side posts. Apply any targets directly to either side of the Velcro mat.

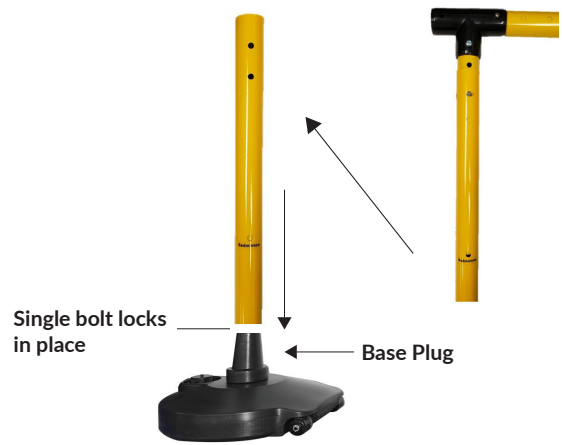

Top Velcro Flap

